


# HSN Variable transformers

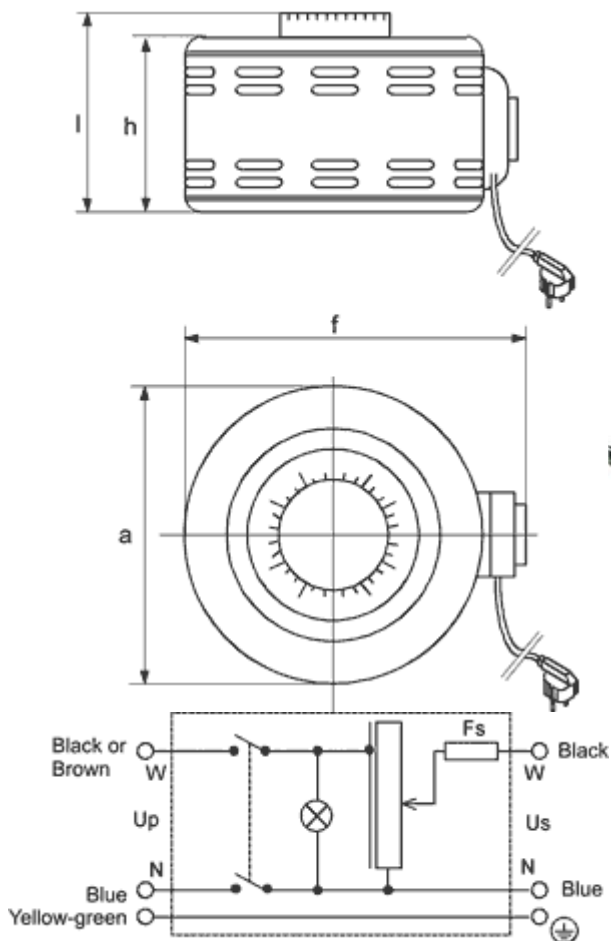

Output voltage range

0...260 V

Thermal class

Ta40B

Pri./sec. insulation strength

4kV/60s

Sealing

IP00

Insulation class

I

Code	Weight [kg]	Power [VA]	Secondary winding current 1 [A]
HSN0103-1.25KW	6	1.25	5
HSN0203-1.82KW	8.5	1.82	7
HSN0303-3.38KW	12	3.38	13

Code	A [mm]	F [mm]	H [mm]	L [mm]
HSN0103-1.25KW	170	206	136	157
HSN0203-1.82KW	202	240	136	157
HSN0303-3.38KW	268	305	134	157